

# MODULE TEMPO SOUS GAINE THERMO

## MODULE TEMPO INTELLIGENT

## MODULE RELAIS

### CARACTÉRISTIQUES PRODUITS

Dimensions H x l x P		TPNC PTM1224 RM61224	28,61 x 62,74 x 13,60 mm 73,20 x 63,30 x 18 mm 48 x 70 x 23,50 mm	
V OUT	TPNC ⇒	12-24V DC	mA DC	-
	PTM1224 ⇒	12-24V DC		50 mA max.
	RM61224 ⇒	6-12-24V DC		70 mA
V/A	TPNC ⇒	24V DC-10 A	s	5 - 60 s
	PTM1224 ⇒	24V DC-8 A 120V AC-8 A		1 - 3600 s
	RM61224 ⇒	30V DC-5 A 230V AC-5 A		-
°C	-10 +60 °C			



TPNC



PTM1224



RM61224

#### TPNC

TEMPO 12-24V DC sous gaine thermo 1 contact NC  
5-60 sec

0,016 kg

#### PTM1224

Module tempo «intelligent» 12-24V DC / 5 programmes


0,06 kg

#### RM61224


Module relais 6-12-24V DC - 2 contacts

0,08 kg

Code douanier  
85318080

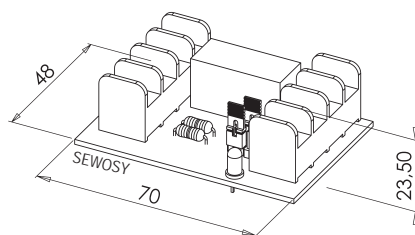

RM61224

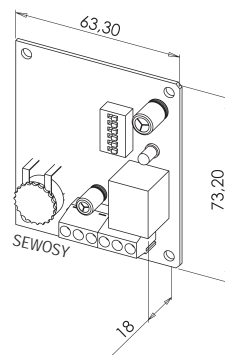

PTM1224

