




DS-D5022FC 21.5" Monitor



Key Features

- LED backlit technology with full HD 1920×1080
- Wide view angle: 170° (H)/160° (V)
- Image processing: 3D comb filter, 3D De-interlace, 3D noise reduction
- Multiply inputs: HDMI, VGA, BNC, audio in
- Multiply outputs: BNC, audio output
- Build-in speaker
- External video play via USB port
- High reliability and stability, 24/7 operation
- VESA stand bracket
- Green energy: Enter standby mode while no signal input

Interfaces

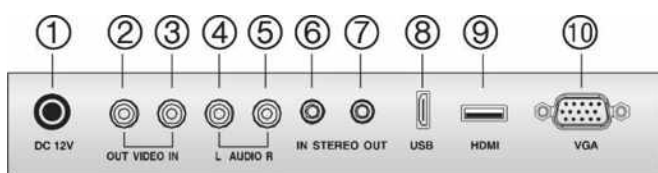

NO.	Description
1	DC 12V Input
2	VIDEO OUT: BNC output
3	VIDEO IN: BNC Input
4	AUDIO L: AUDIO signal input left
5	AUDIO R: AUDIO signal out Right
6	Stereo in: AUDIO signal input
7	Stereo Out: AUDIO signal output
8	USB
9	HDMI: HDMI signal input
10	VGA: VGA Analog Signal Input

Model

DS-D5022FC

Specifications

Model	DS-D5022FC	
Backlight	LED Backlight	
Screen Size	21.5 inch	
Pixel Pitch	0.248 mm (H) × 0.248 mm (V)	
Max Resolution	1920×1080@60Hz	
Brightness	250 cd/m ²	
Contrast	1000: 1	
Response Time	5 ms	
Color	16.7M	
Active Area (H×V)	476.64mm× 268.11mm	
Viewing Angle	Horizontal 170°, vertical 160°	
Interfaces	HDMI input	1
	VGA input	1
	BNC(in/out)	In×1, Out×1
	Audio(L/R)	In×1, Out×1, 3.5 mm mini-jack
	Stereo(in/out)	In×1, Out×1
	USB	1
Power Supply	DC12V/3.0A	
Power Consumption	≤30W	
Standby Power Consumption	≤ 0.5 W	
Loudspeaker	2*2W	
Working Temperature	0 to 40 °C (32 to 104 °F)	
Working Humidity	10 to 85 %	
Storage Temperature	-20 to 55 °C (-4 to 131 °F)	
Storage Humidity	5 to 95%	
Color of Casing	Black	
VESA	M4, 100 mm × 100 mm	
Dimensions(W*H*D)	511.4mm×313mm×45.4mm / 511mm×377mm×170mm(with base)	
Package Dimension (W×H×D)	565mm×435mm×105mm	
Gross Weight	4.6Kg	
Net Weight	3.2kg	
Accessories	VGA cable	1
	Power cord	1
	User manual	1
	Adapter	1
	Base bracket	1
	warranty card	1
Bracket	Base bracket	Contain 1
	Wall mounted	Optional DS-DM1940W
*Note	All specifications mentioned above are subject to the actual product	

Dimensions (unit: mm)

